



www.inobrezice.com
www.facebook.com/Ino.Brezice
www.youtube.com/InoBrezice
twitter.com/InoBrezice
issuu.com/inobrezice

DUPLEX 800 TRIPLEX 800



INO Brežice d.o.o.,
Krška vas 34/b, 8262 Krška vas,
SLOVENIA, EU
www.inobrezice.com,
ino@inobrezice.si
In Quality We Trust



Professional, hydraulic folding machine for mulching wide range of plants and plant residues.

It can shred branches up to 6 cm in diameter.

With great efficiency (up to 6 ha/hour) it is suitable for contractors and bigger farms.

Flail mower is easy to transport with only 3 m of transport width.

Floating construction and angular adjustment $\pm 15^\circ$ allows high-quality mulching across the whole working width.

Installation of hammers in the form of a double spiral allows up to 24% less power consumption.

Flail mower is made robust which ensures long life even in the toughest working conditions.

DUPLEX 800, TRIPLEX 800

Technical data	
Working width [cm]	790
Width [cm]	803
Transport height [cm]	325
Transport width [cm]	300
Power requirements [kW/HP]	160-205/220-280
P.T.O. 1000 min ⁻¹	●
Rotor min ⁻¹	2250
Weight-hammers [kg]	2350
Weight-Y knives [kg]	2345
No. of hammers [pcs]	96
No. of Y knives [pcs]	288
3- point linkage cat.	II. in III.
MAX diameter of the branches to be mulched *	6 cm
Terrain adjustable (floating)	$\pm 15^\circ$
Doublespiral rotor	●
Hammers	●
Gearbox with free wheel clutch	●
Fan for extra belt cooling	●
Automatic belt tensioner	●
Hydraulic foldable	●
Height adjustable rear roller	●
Rear roller diameter 140 mm	●
P.T.O. shaft	●
Combi mount (front&rear)	●
Road lightening kit	○
Reflective panels	○
Option	
3 - point linkage for reversible tractors	○
Trailer with brakes***	○
Hydraulic lift-floating system	○
Rear roller diameter 170 mm	○
Y knives**	○
Extra support legs for storing in folded position	○
GPS system INO Tracking	○
Video system	○



* Depends of the sort and moisture of branches

● Standard


**MAX diameter of the branches to be mulched with Y knives is 3cm

○ Option


*** Only on flail mower **TRIPLEX 800**

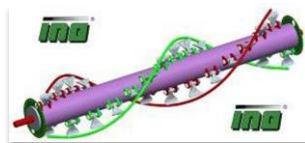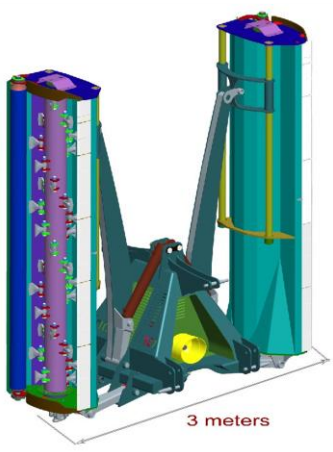


Patented rotor with double spiral distribution of working blades at an angle of 45° . Such setup allows power savings up to 24%. Rotor operates more quietly with less strain on all parts of flail mower.

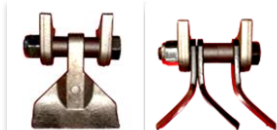

Hammers as standard, Y knives as option for lightweight tasks.

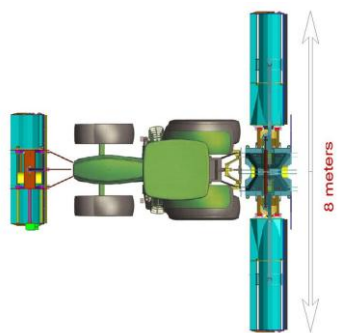

Front mounted EURO 280 and rear mounted **DUPLEX 800**

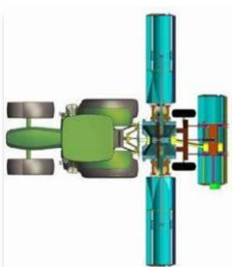

Rear trailed version **TRIPLEX 800**.